

K1602SE Series

14 DIP, 5.0 Volt, Sinewave, TCVCXO



Ordering Information

00.0000
MHz


K1602SE -R

Product Series ————|

RoHS Compliance ————|

Blank: non-RoHS compliant part
-R: RoHS compliant part
Frequency (customer specified) ————|

- Former **Champion** TECHNOLOGIES, INC. Product
- Phase-Locked Loops, SONET, Reference Signal, Signal Tracking, ATM

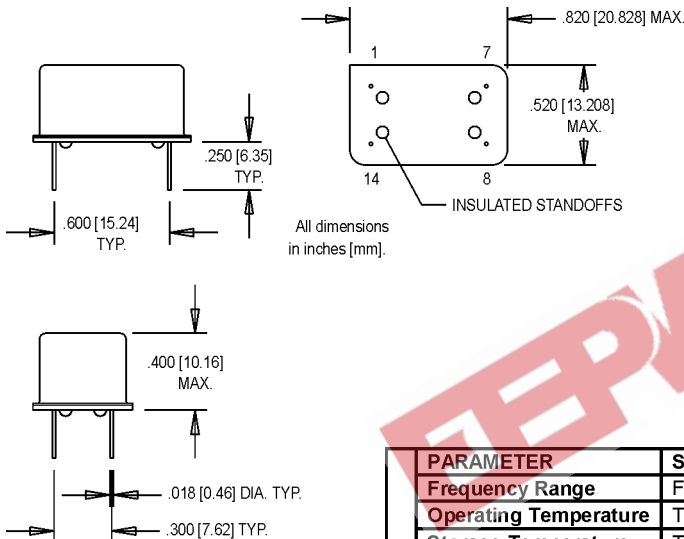

Pin Connections

PIN	FUNCTION
1	EFC, Control Voltage
7	Ground/Case Gnd
8	Output
14	+Vdd


PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes	
Frequency Range	F	90		115	MHz		
Operating Temperature	T _A	-40		+85	°C		
Storage Temperature	T _S	-40		+85	°C		
Frequency Stability	ΔF/F			±7.0	ppm	See Note 1	
Aging (10 year)		-2		+2	ppm		
Control Voltage	V _c	0	2.0	4	V	Positive monotonic slope	
Tuning Range		±4		±15	ppm	V _c = 0.5V to 3.5V	
Modulation Bandwidth	f _m				kHz	±3dB	
Input Impedance	Z _{in}	50k			Ω	@ 10kHz	
Input Voltage	V _{dd}	4.75	5.0	5.25	V		
Input Current	I _{dd}			20	mA		
Output Type						Sinewave	
Load			50 Ω			See Note 2	
Output Level		1.0			V p-p	Into 50 Ω	
Output Power	P _o		+2	+4	dBm	50 Ω	
Start up Time				10	ms		
Phase Noise (Typical)		10 Hz -65	100 Hz -95	1 kHz -120	10 kHz -140	100 kHz -150	Offset from carrier dBc/Hz
Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sinewave)						
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)						
Hermeticity	Per MIL-STD-202, Method 112, (1x10 ⁻⁸ atm. cc/s of Helium)						
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B (-55°C to +125°C, 15 min. dwell, 10 cycles)						
Solderability	Per EIAJ-STD-002						
Soldering Conditions	+240°C max. for 10 secs.						

1. Inclusive of calibration, temperature, voltage, load and aging.
2. See load circuit diagram #8

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.


Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

MtronPTI Lead Free Solder Profile

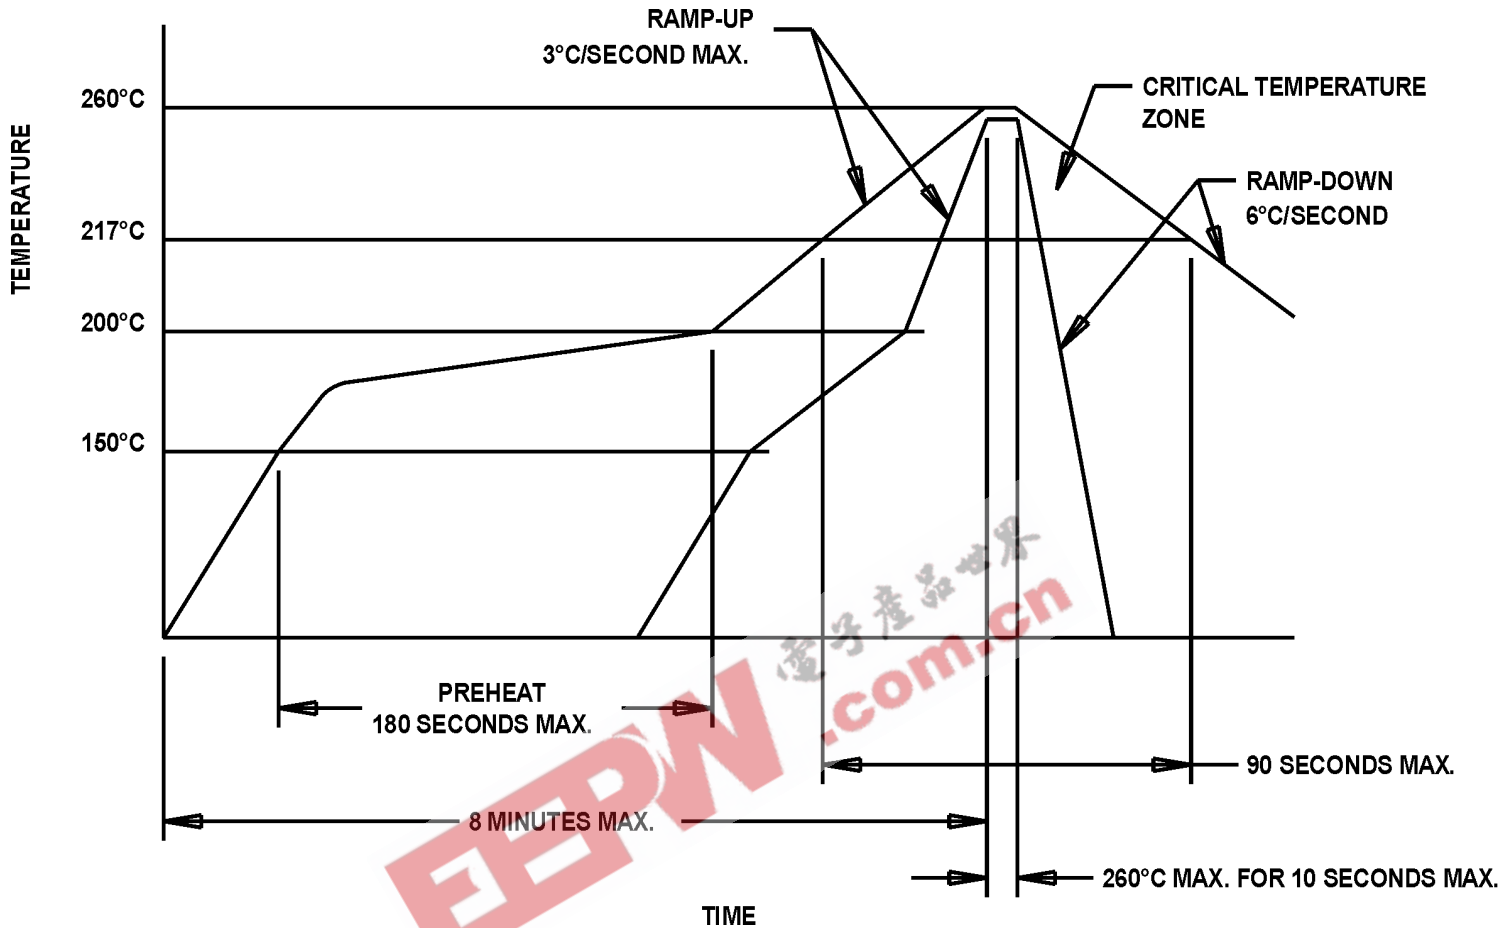

MtronPTI Non-RoHS Profile

240°C
All the remaining surface mount,
both crystal and oscillator.

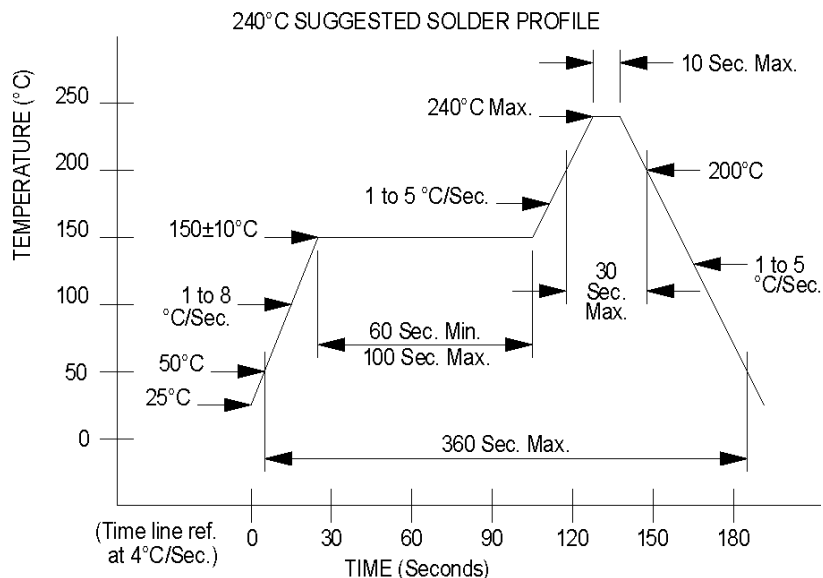

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.